


Technical data

- 1. Nominal voltage: 300V/10A
PITCH: 5.08mm
- 2. Connection capacity:
AWG 26-12
- 3. Insulation Withstands Voltage:
AC 1600V/MIN
- 4. Insulation Resistance:
1000M Ω or more at DC500V
- 5. Stripping length: 8-9mm
- 6. Using temperature range: -40C \circ +115C \circ
- 7. Undimentioned Tolerances:

Dim L = P x 5.08	Dim B	Dim L
Dim B = (P - 1) x 5.08		
P = number of poles		
0-30mm	± 0.15	± 0.20
over 30mm-60mm	± 0.20	± 0.25
over 60mm-90mm	± 0.25	± 0.30
over 90mm	± 0.30	± 0.40

- 8. Safety approval:
 - 9. RoHS Compliance
 - 10. Critical dimension:
- PAFD508 xxx X xxxx
 ① Poles 02-24
 ② Color
 ③ Black 3 Orange 5 Green 6 Blue 8 Grey....
 ④ Custom
 000 K MARK 00K KUNACON MARK....

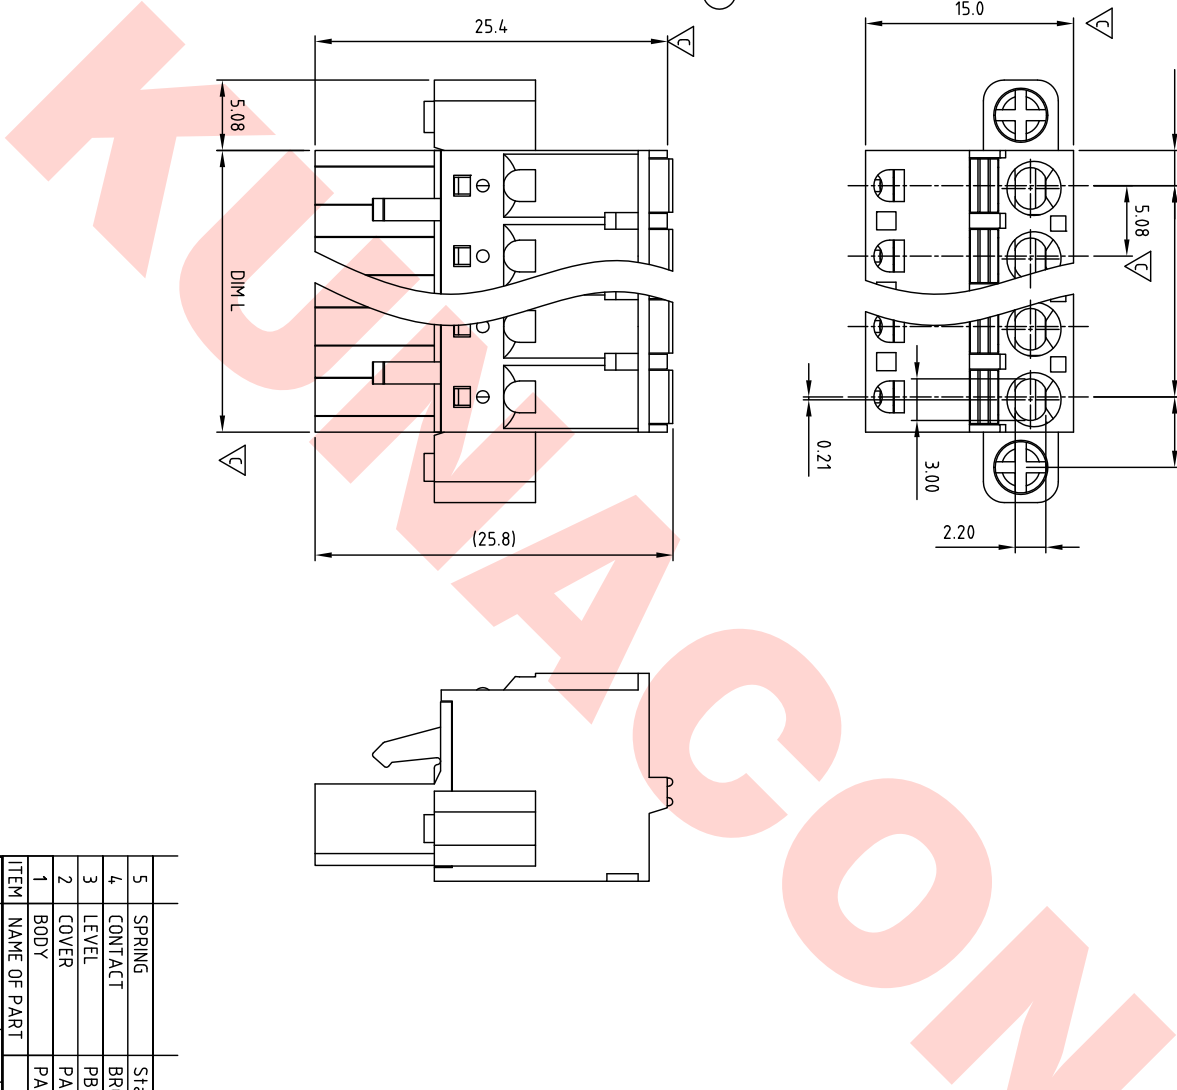

5	SPRING	Stainless steel			P
4	CONTACT	BRONZE (PbZ)			P
3	LEVEL	PBT UL94V-0			P
2	COVER	PA66 UL94V-0			1
1	BODY	PA66 UL94V-0			1

ITEM	NAME OF PART	MATERIAL	NOTES
DWG. W/F.	Zhang	DATE	2016.03.10
CHK.	W/F. Zhang	DATE	2016.03.30
APP.	Marvin Zhang	DATE	2016.03.30

DWG. NO.	PA-F508-B001
PART NO.	PAFD508xxxxxx
TITLE:	flange
SCALE:	NONE 2.5:1 (.) REV.: A
UNITS:	MM
SHEET:	1 OF 1
Tolerance	± 0.50 ± 0.30 ± 0.10 $\pm 1^{\circ}$

DATE	CHK.	DESCRIPTION	SIGN.



KUNA Contact Technology Co. Ltd
<http://www.kunacon.com>