
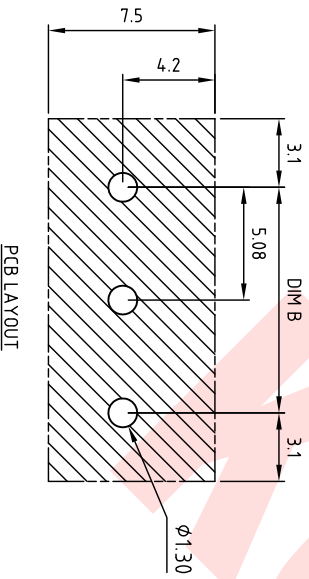
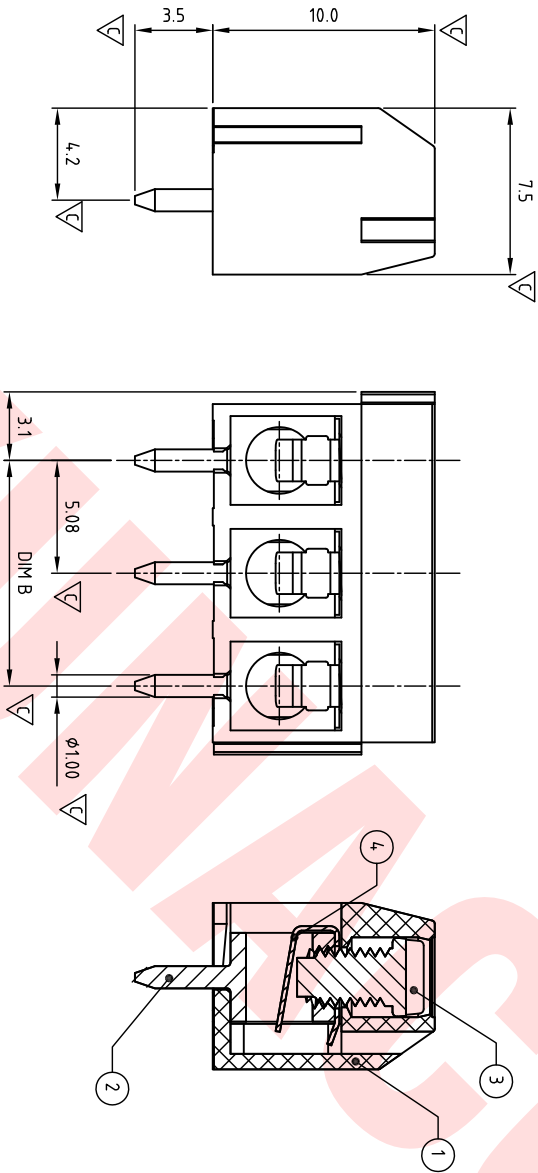


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

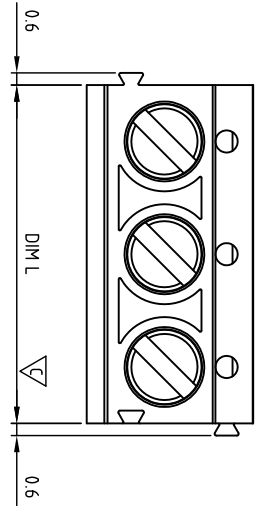

Technical data

- 1.Nominal voltage: 300V/15A
PITCH:5.08mm
- 2.Connection capacity:
AWG 22-14
- 3.Insulation Withstands Voltage:
AC 1600V/MIN
- 4.Insulation Resistance:
1000MΩ or more at DC500V
- 5.Tightening torque:
4.0kgf.cm (0.4N.m)
- 6.Screw thread: M2.6
- 7.Stripping length: 5-6mm
- 8.Using temperature range:-40C~+115C°
Soldering temperature:250±10C°/5s
- 9.Undimentioned Tolerances:

Dim.L=P×5.08	Dim B	Dim L
Dim.B=(P-1)×5.08	0-30mm	±0.15
P= number of poles(2-24P)	over 30mm-60mm	±0.20
	over 60mm-90mm	±0.25
	over 90mm	±0.30

- 10.Safety approval:
- 11.RoHS Compliance
- 12.Critical dimension:

- DBHM508 ~~XXXX~~ XXXX
 ① Poles 02-24
 ② Color
 0 Black 3 Orange 5 Green 6 Blue 8 Grey.....
 ③ Custom
 000 "K" logo 00K KUNACON logo

4	WIRE GUARD	Stainless steel			P
3	SCREW	STEEL	M2.6×0.4, Zn Plated		P
2	CAGE	BRASS	M2.6×0.4, Tin PLATED		P
1	BODY	PA66 UL94V-0	ALL COLOR		1
ITEM NAME OF PART MATERIAL NOTES					
DWG.WF: Zhang	DATE: 2016.03.10	UNITS: MM	SHEET: 1 OF 1	Tolerance	
CHK. W/F: Zhang	DATE: 2016.03.31	SCALE: NONE 2.5:1 (.)	REV.: A	±0.50	
APP. Marvin Zhang	DATE: 2016.03.31	TITLE: DB-H508 Series 2-Interlock		±0.30	
		"-" slot screw type		±0.10	
		PART NO. DBHM508XXXXXX		X°	
		DWG NO. DB-H508-B001		±1°	

△	SIGN		
	DESCRIPTION		
	CHK.		
	DATE		

KUNACON Contact Technology Co, Ltd
<http://www.kunacon.com>