


Technical data

- 1.Nominal voltage: 300V/15A  
PITCH:5.08mm
- 2.Connection capacity:  
AWG 30-12
- 3.Insulation Withstands Voltage:  
AC 1600V/MIN
- 4.Insulation Resistance:  
1000M $\Omega$  or more at DC500V
- 5.Tightening torque:  
4.3LB-in (0.5Nm/5.0kgf.cm)
- 6.Screw thread: M3
- 7.Stripping length: 7-8mm
- 8.Using temperature range:-40C $\circ$ -115C $\circ$
- 9.Undimensioned Tolerances:

Dim:L=P $\times$ 5.08 Dim:B=(P-1) $\times$ 5.08 P = number of poles	Dim B	Dim L
0-30mm	$\pm 0.15$	$\pm 0.20$
over 30mm-60mm	$\pm 0.20$	$\pm 0.25$
over 60mm-90mm	$\pm 0.25$	$\pm 0.30$
over 90mm	$\pm 0.30$	$\pm 0.40$

10.Safety approval: 

11.RoHS Compliance

12.Critical dimension: 

MES0508 xx X xxx

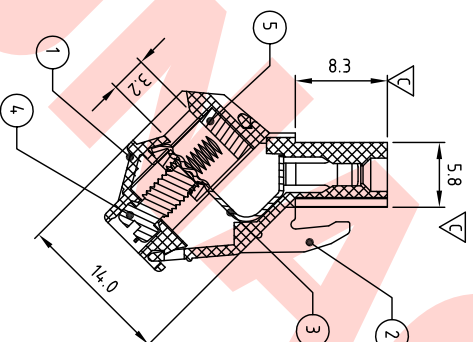

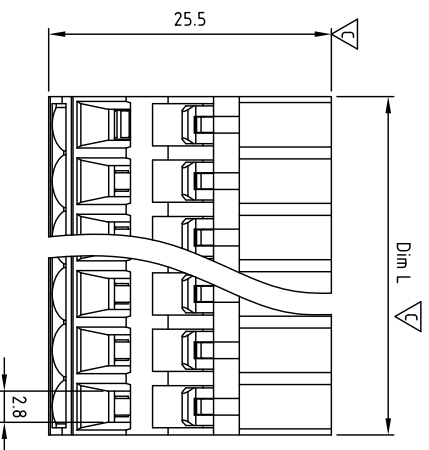
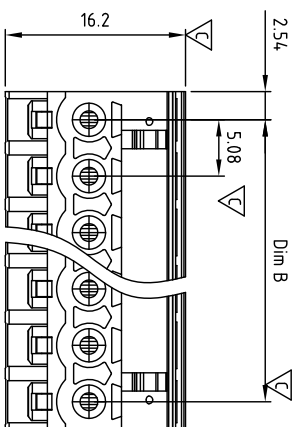
① ② ③



① Poles 02-24

② Color

0 Black 3 Orange 5 Green 6 Blue.....

③ Custom  
000 K MARK 00K KUNACON MARK.....



APPROVAL SIGN	DESCRIPTION	CHK.	DATE
			
 KUNACON Contact Technology Co., Ltd <a href="http://www.kunacon.com">http://www.kunacon.com</a>			
ITEM	NAME OF PART	MATERIAL	NOTES
5	CAGE	BRASS	
4	SCREW	STEEL	M3.0 $\times$ 0.5, Ni PLATED
3	WIRE GUARD	BRONZE (PbZ)	M3.0 $\times$ 0.5, Zn Plated
2	COVER	PA66 UL94V-0	TIN PLATED
1	BODY	PA66 UL94V-0	ALL COLOR
DWG.	Marvin Zhang	DATE	2016.03.10
CHK.	Marvin Zhang	DATE	2016.03.30
APP.	Marvin Zhang	DATE	2016.03.30
TITLE:	ME-S0508 Series " " slot		
PART NO.:	MES0508xxxxxx		
DWG NO.:	ME-S508-B001		
		Tolerance	
		$\pm 0.50$	
		$\pm 0.30$	
		$\pm 0.10$	
		$\pm 1^{\circ}$	