
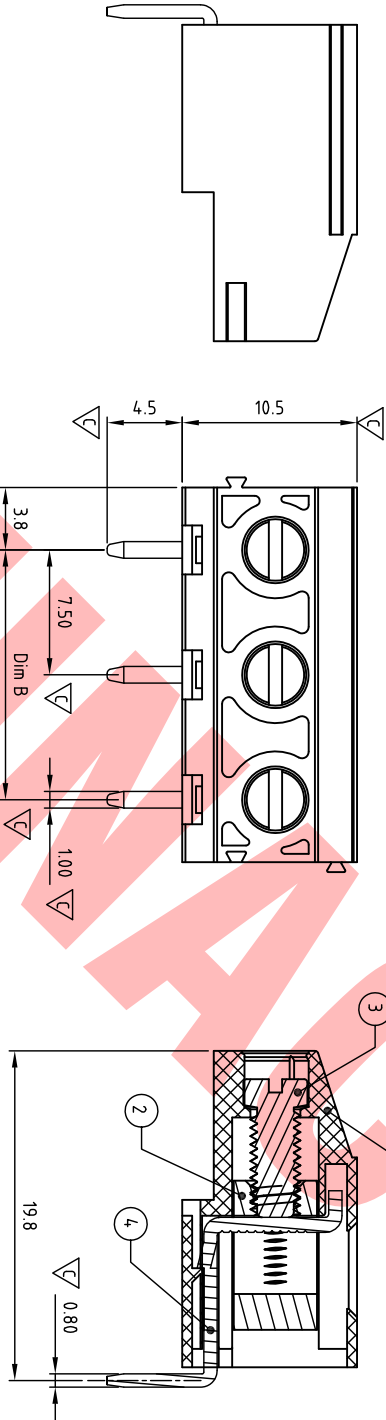


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

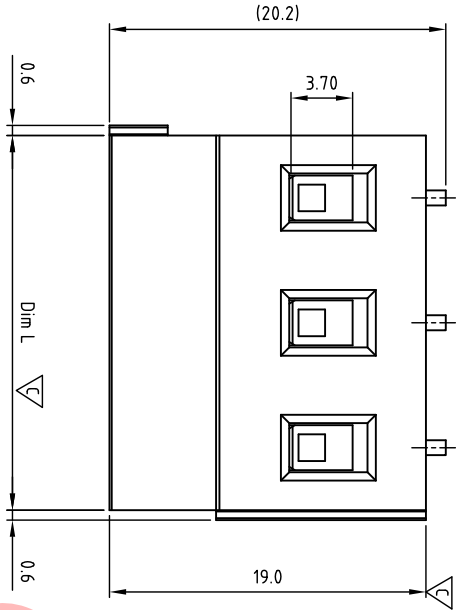

Technical data

1. Nominal voltage: 300V/20A
PITCH: 5.0mm
2. Connection capacity:
AWG 30-12
3. Insulation Withstands Voltage:
AC 1600V/MIN
4. Insulation Resistance:
1000M Ω or more at DC500V
5. Tightening torque:
4. 3Lb-In(5.0kgf.cm / 0.5N.m)
6. Screw thread: M3
7. Stripping length: 7-8mm
8. Using temperature range: -40C $^{\circ}$ -115C $^{\circ}$
Soldering temperature: 250 \pm 10C $^{\circ}$ /5s
9. Undimensioned Tolerances:

Dim L=P \times 7.5 Dim B=P-1 \times 7.5 P= number of poles (02-16P)	Dim B	Dim L
0-30mm	± 0.15	± 0.20
over 30mm-60mm	± 0.20	± 0.25
over 60mm-90mm	± 0.25	± 0.30
over 90mm	± 0.30	± 0.40

10. Safety approval:
11. RoHS Compliance
12. Critical dimension: ∇

EJVM750 XX X HXX

- ① Poles 02-24
- ② Color
- ③ Custom

0 Black 5 Green 6 Blue G Pale gray 8 Dark gray...
H00 K MARK H0K KUNACON MARK.....

ITEM	NAME OF PART	MATERIAL	NOTES
4	CONTACT	BRASS	Tin PLATED
3	SCREW	STEEL	M3 \times 0.5, Zn Plated
2	CAGE	BRASS	M3 \times 0.5, Ni PLATED
1	BODY	PA66 UL94V-0	ALL COLOR

DWG	WF. Zhang	DATE	2017.12.05	MM	SHEET: 1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2018.05.22	NONE 3:1 (.)	REV.: A	± 0.50
APP.	DATE					± 0.30
						± 0.10

TITLE:	900 " " Slot Screw(H=19.0mm)
PART NO.	EJVM750XXHX
DWG NO.	EJ-V750-B001

SIGN	DESCRIPTION	CHK.	DATE

KUNACON Technology Co. Ltd
http://www.kunacon.com

Tolerance
 ± 0.50
 ± 0.30
 ± 0.10
 $\pm 1^{\circ}$