


Technical data

1. Nominal voltage: 300V/8A  
PITCH: 3.5mm
2. Connection capacity:  
AWG 24-16
3. Insulation Withstands Voltage:  
AC 1600V/MIN
4. Insulation Resistance:  
1000MΩ or more at DC500V
5. Stripping length: 9-10mm
6. Using temperature range: -40C ~+15C
7. Undimentioned Tolerances:

	Dim B	Dim L
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

8. Safety approval:
  9. RoHS Compliance
  10. Critical dimension:
- PDSD350** XX X XXX  
 ① Poles 2x2P-2x24P  
 ② Color  
 0 Black 5 Green 6 Blue G Plae grey....  
 ③ Custom  
 000 K-MARK 00K KUNACON MARK

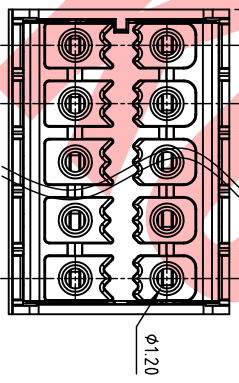

ITEM	NAME OF PART	MATERIAL	NOTES
5	WIRE GUARD	Stainless steel	
4	CONTACT	BRONZE (PbBi)	
3	LEVEL	PBT UL94V-0	
2	COVER	PA66 UL94V-0	
1	BODY	PA66 UL94V-0	

DWG.	WF. Zhang	DATE	2017.12.13	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2018.05.31	SCALE:	NONE 3:1 (.)	REV.:	A	±0.50
APP.		DATE		TITLE:	PD-SD350 Series Double row Plug W/O Flange			±0.30
				PART NO.:	PDSD350XXXXXX			±0.10
				DWG NO.:	PD-S350-B001			±1*

DESCRIPTION: \_\_\_\_\_  
 SIGN: \_\_\_\_\_  
 CHK: \_\_\_\_\_  
 DATE: \_\_\_\_\_



KUNA Contact Technology Co., Ltd  
 http://www.kunacon.com