
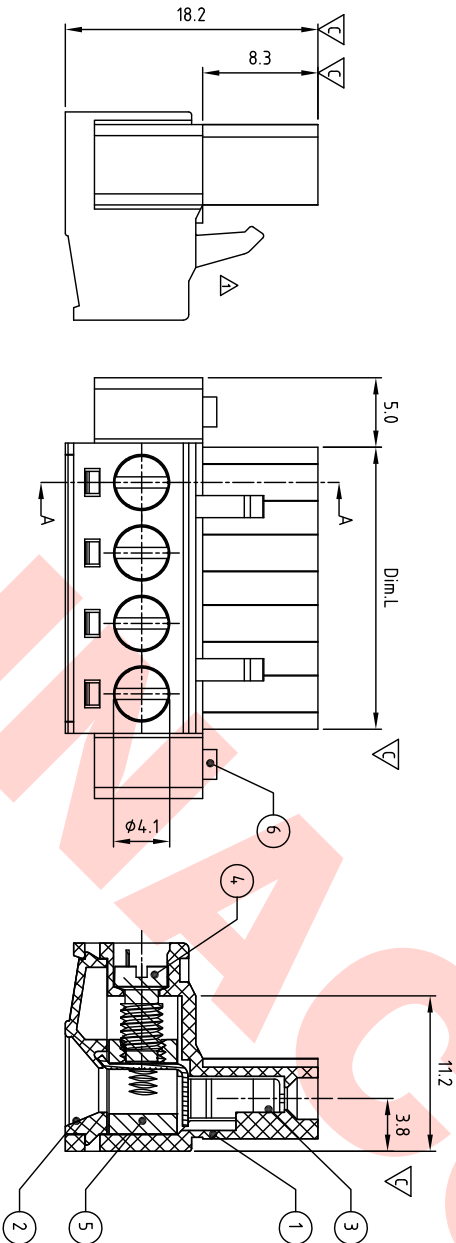


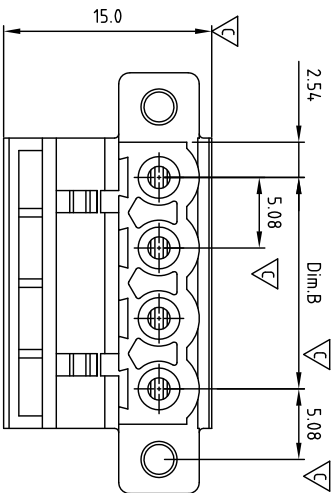

Technical data

- Nominal voltage: 300V/15A (IEC 320V/12A)
PTTCH:5.08mm
- Connection capacity:
AWG 30-12 (0.2-2.5mm²)
- Insulation Withstands Voltage:
AC 1600V/MIN / 2500V/MIN
- Insulation Resistance:
1000MΩ or more at DC500V
- Tightening torque:
5.0kgf.cm (0.5N.m)
- Screw thread: M3
- Stripping length: 7-8mm
- Using temperature range: -40℃~+115℃
- Undimentioned Tolerances:

Dim.L=P×5.08 Dim.B=(P-1)×5.08 P = number of poles	Dim B	Dim L
	0-30mm over 30mm-60mm over 60mm-90mm	±0.15 ±0.20 ±0.25 ±0.30 ±0.40

10.Safety approval:  

11.RoHS Compliance

12.Critical dimension: 

MAFD508 ^①xx ^②x ^③xxx

① Poles 02-24

② Color

0 Black 3 Orange 5 Green 6 Blue.....

③ Custom
000 K MARK 00K KUNACON MARK.....

6	FLANGE SCREW	STEEL	M2.5×0.45, Zn PLATED	2	
5	CAGE	BRASS	M3.0×0.5, Ni PLATED	P	
4	SCREW	STEEL	M3.0×0.5, Zn Plated	P	
3	WIRE GUARD	BRONZE (PbZ)	TIN PLATED	P	
2	COVER	PA66 UL94V-0	ALL COLOR	1	
1	BODY	PA66 UL94V-0	ALL COLOR	1	
ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY	
DWG.	WF. Zhang	DATE	2016.03.10	UNITS: MM SHEET: 1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2016.03.30	SCALE: NONE 2.5:1 () REV: B	X ±0.50 X.X ±0.30 X.XX ±0.10
APP.	Marvin Zhang	DATE	2016.03.30	TITLE: Screw W/flange PART NO. MAFD508xxxxxx	X* ±1°
KUNA Contact Technology Co. Ltd http://www.kunacon.com					
					
					
					



KUNA Contact Technology Co., Ltd
<http://www.kunacon.com>

SIGN	DESCRIPTION	CHK.	DATE
	With hook is changed.	WF Zhang	03/16