


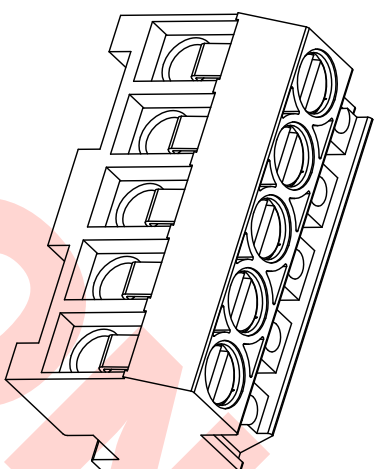

Technical data

- 1.Nominal voltage: 300V/10A
PITCH:5.0mm
- 2.Connection capacity:
AWG 26-12
- 3.Insulation Withstands Voltage:
AC 1600V/MIN
- 4.Insulation Resistance:
1000MΩ or more at DC500V
- 5.Tightening torque:
3.5 Lb-in (4 kgf.cm/0.4 N.m)
- 6.Screw thread: M3
- 7.Stripping length: 6-7mm
- 8.Using temperature range:-40℃~115℃
- 9.Undimentioned Tolerances:

Dim L=P×5.0 Dim B=(P-1)×5.0 P= number of poles(2-24p)		
0-30mm over 30mm-60mm over 60mm-90mm over 90mm	Dim B ±0.15 ±0.20 ±0.25 ±0.30	Dim L ±0.20 ±0.25 ±0.30 ±0.40

10.Safety approval:

11.RoHS Compliance

12.Critical dimension:

ND50500 XX X XXX

①②③






① Poles 02-24

② Color

0 Black 2 Red 3 Orange 5 Green 6 Blue 8 Grey....

③ Custom

000 "K" logo 00K KUNACON logo

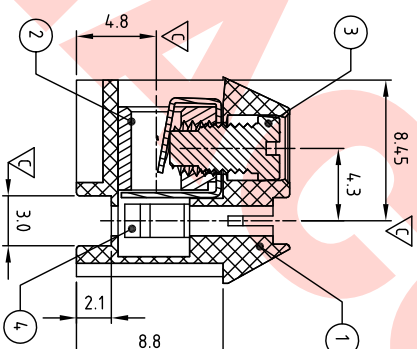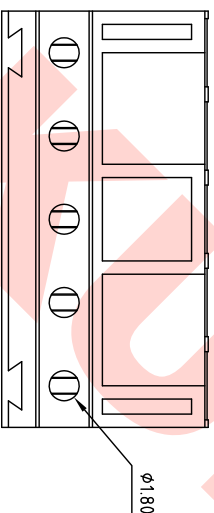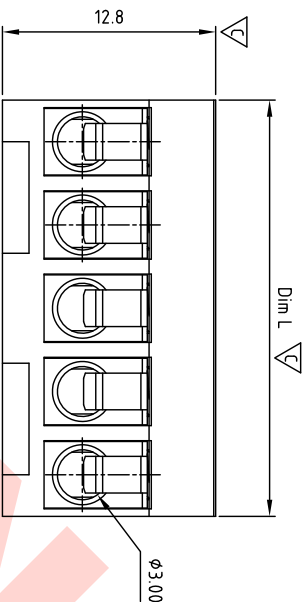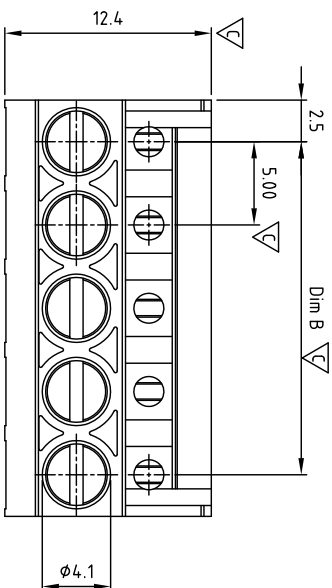

4	WIRE GUARD	PHBz	t=0.3mm	P
3	SCREW	STEEL	M3×0.5, Zn Plated	P
2	CAGE	BRASS	M3×0.5, Tin PLATED	P
1	BODY	PA66 UL94V-0	ALL COLOR	1
ITEM NAME OF PART MATERIAL NOTES				
DWG./W.F. Zhang	DATE 2016.03.10	UNITS:	MM	SHEET: 1 OF 1
CHK. W.F. Zhang	DATE 2016.03.30	SCALE:	NONE 3:1 ()	REV.: A
APP. Marvin Zhang	DATE 2016.03.30	TITLE:	ND-S500 Series "X" slot type screw	X.XX ±0.30 X.XX ±0.10 X° ±1°
PART NO.	ND50500xxxxxx	DWG NO.	ND-S500-B001	



KUNA Contact Technology Co., Ltd
<http://www.kunacontact.com>

△
SIGN

DESCRIPTION

CHK.

DATE